PCT


WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : A61F 2/06	A1	(11) International Publication Number: WO 96/10375 (43) International Publication Date: 11 April 1996 (11.04.96)
(21) International Application Number: PCT/NL (22) International Filing Date: 4 October 1995 (36 (81) Designated States: JP, US, European patent (AT, BE, CH, DE, DK, ES, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE).
(30) Priority Data: 9401633 4 October 1994 (04.10.94)	N	Published With international search report.
(71) Applicant (for all designated States except US): CARL CULAR CONCEPTS, INC. [US/US]; 3260 Alpin Portola Valley, CA 94028 (US).	DIOVA: ne Roa	3- d,
(72) Inventors; and (75) Inventors/Applicants (for US only): KALMANN, [NL/NL]; Hullenkant 45, NL-8075 PD Elsper MOLL, Franciscus, Laurens [NL/NL]; Duint NL-3735 La Bosch en Duin (NL).	et (NL).
(74) Agent: VAN SOMEREN, Petronella, Francisca, E Maria; Arnold & Siedsma, Sweelinckplein 1, NL-2 The Hague (NL).		

(54) Title: ASSEMBLY FOR TREATING BLOOD VESSELS AND A METHOD THEREFOR

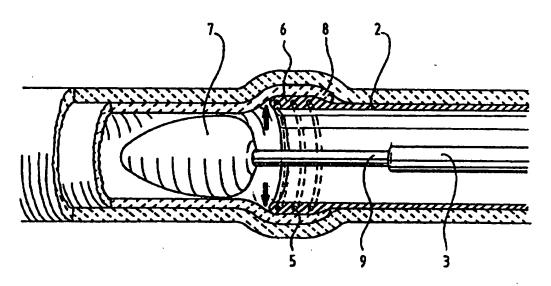

(57) Abstract

The invention relates to a blood vessel treating assembly comprising: an artificial blood vessel inner layer such as an artificial tunica-intima or the like for replacing a section of blood vessel inner layer previously removed from a blood vessel and/or for covering a predetermined length of damaged blood vessel inner layer, wherein said artificial blood vessel inner layer is associated with the existing blood vessel in such a way as to substantially stop any loose parts of the blood vessel from obstructing the stream of blood through said blood vessel; and introducing means for introducing the artificial blood vessel inner layer into the blood vessel.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

		GB	United Kingdom	MR	Mauritania
AT	Austria	GE	Georgia	MW	Malawi
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria			PL	Poland
BJ	Benin	rr	 ,	PT	Portugal
BR	Brazil	JP KE	lapan Kenya	RO	Romania
BY	Belarus	KG	Kyrgystan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic	SD	Sudan
CF	Central African Republic	r.	of Korea	SE	Sweden
CG	Congo	KR	Republic of Korea	SI	Slovenia
CH	Switzerland	KZ	Kazakhstan	SK	Slovakia
a	Côte d'Ivoire	LI LI	Liechnenstein	SN	Senegal
CM	Cameroon	LK	Sri Lanka	TD	Chad
CN	China		Lexembourg	TG	Togo
CS	Czechoslovakia	LV LV	Larvia	TJ	Tajikistan
CZ	Czech Republic		Monaco	TT	Trinidad and Tobago
DE	Gennany	MC	Republic of Moldova	UA	Ukraine
DK	Denmark	MD MG	Madagascar	US	United States of America
ES	Spain	ML	Mali	UZ.	Uzbekistan
FI	Finland	MN	Mongolia	VN	Viet Nam
FR	France	MIN	Minison		
GA	Gabon				

ASSEMBLY FOR TREATING BLOOD VESSELS AND A METHOD THEREFOR

This invention relates to an assembly for the treating of blood vessels and more specifically to an assembly for the replacing of and/or covering up of damaged, blood vessel inner layers and to a method therefor.

An often occurring medical problem is the silting up of blood vessels with for instance calcium, so-called arteriosclerosis. Because of this, a blockage of the blood vessel occurs, so-called stenosis.

Stenosis of blood vessels which leads to a

10 narrowing and, in some cases, complete blocking of the blood
vessel can lead to dangerous consequences for the patient.
Circulatory problems and a deteriation in health can ensue.
Advanced stenosis, if not operated upon, can cause wastage
and death of body tissue, necessitating, in certain

15 instances, in amputation.

A known procedure for unblocking blood vessels, 'End artery ectomy', is to separate the inner layer of the blood vessel, the so called tunica-intima, from the blood vessel wall, to cut through and sever the tunica-intima over the blocked length of the bloodvessel and then to remove the tunica-intima plus blockage from the body. A new tunica-intima then grows back to replace this removed tunica-intima.

A problem here is that this new tunica-intima, the 25 so called neo-tunica-intima has the tendency to undergo restenosis, i.e. to silt up again, at a quicker rate than the original tunica-intima.

Another problem is that the original tunica-intima is usually separated from the blood vessel wall upto a 30 distance just past where it is to be severed. Hence on removal of the original tunica-intima, a small piece of this is left hanging loosely in the blood stream, a factor which can cause and hasten the restenosis of the blood vessel.

PCT/NL95/00336 WO 96/10375

A blood vessel which is particularly susceptible to stenosis is the artery between the groin and the knee.

It is an object of the present invention to obviate at least one of these problems. To this end there is 5 provided, according to a first aspect of the present invention, a blood vessel treating assembly comprising:

- an artificial blood vessel inner layer such as an artificial tunica-intima or the like for replacing a section of blood vessel inner layer previously removed from 10 the blood vessel and/or for covering a predetermined length of damaged blood vessel inner layer, wherein said artificial blood vessel inner layer is associated with the existing blood vessel in such a way as to substantially withhold any loose parts of the blood vessel from obstructing the stream 15 of blood through said blood vessel, and

- introducing means for introducing the artificial blood vessel inner layer into the blood vessel.

In this way an artificial new tunica-intima to replace the old tunica-intima over the removed length 20 thereof and which prevents the re-growing of a natural 'neotunica-intima', can be introduced into a blood vessel, to just past the piece of loose hanging original tunica-intima left after removal of a section of the original tunicaintima for instance, this artificial new tunica-intima made 25 of such material as to cause a minimum of restenosis of the blood vessel to occur and which pushes the old loose hanging piece of left behind tunica-intima back against the blood vessel wall where it re-grows onto the blood vessel wall and thus no longer flaps about in the blood stream.

According to a second aspect of the present invention there is provided an artificial blood vessel inner layer, such as an artificial tunica-intima or the like, made of any suitable synthetic material and comprising diameter arranging means for increasing and/or decreasing the 35 diameter of the tube-like section, preferably for use with the above mentioned assembly.

According to a third aspect of the present invention there is provided introducing means for

30

3

introducing an artificial blood vessel inner layer, such as an artificial tunica-intima or the like, into a blood vessel, preferably for use with the assembly and/or the artificial blood vessel inner layer as mentioned above.

invention there is provided a method of replacing a previously removed inner layer of a blood vessel and/or for covering a predetermined length of damaged blood vessel inner layer comprising the steps of inserting a blood vessel treating assembly as mentioned above, via an incision, upto a predetermined distance into a blood vessel, increasing the diameter of the artificial blood vessel inner layer to push against the blood vessel walls, whereafter the introducing means are removed and joining the end of the artificial blood vessel inner layer to the existing blood vessel near the incision.

According to a fifth aspect of the present invention there is provided a method of increasing and/or decreasing the diameter of a length of artificial blood

20 vessel inner layer, as mentioned above, or the like, comprising bringing a length of memory metal associated with the artificial blood vessel inner layer to its preprogrammed activation temperature whereafter expansion/contraction of the memory metal effectively increases/decreases the

25 diameter of the length of artificial blood vessel inner layer.

According to a further aspect of the present invention there is provided an assembly comprising a tube-like section with at least one length of memory metal associated therewith, pre-programmed to assume a desired form and/or expand and/or contract at a pre-determined activation temperature, and introducing means for introducing the tube-like section into a passage-like area.

Further advantages, characteristics and details of 35 the present invention will become clear from the following description with reference to the accompanying drawings which show:

Figure 1 a perspective partly cut away view of a preferred embodiment of the assembly according to the present invention, during introduction into the artery between the groin and the knee;

Figure 2 a partly cut away perspective view of the artificial blood vessel inner layer of the assembly from figure 1;

Figures 3 to 6 partly cut away perspective views showing the succesive steps of the assembly from figure 1 10 carrying out introduction of the artificial blood vessel inner layer from figure 2, into a blood vessel;

Figure 7 a partly cut away perspective view of an embodiment of the artificial blood vessel inner layer according to the present invention, when in position within 15 a blood vessel.

Figures 8 to 9 partly cut away perspective views of a second embodiment of the present invention.

The assembly 1 (figure 1) is introduced into the artery between the groin and the knee, for example,

20 preferably via an incision already made for the removal of the original tunica-intima plus blockage.

This yields the advantage that further incisions for introduction of the assembly into the blood vessel need not be made into the patient, which in turn yields the benefits of reduced stress on the patient, reduced operation

25 benefits of reduced stress on the patient, reduced operation and recovery time and accordingly low hospital costs.

The assembly 1 comprises an artificial blood vessel inner layer 2 (see figures 2 to 7) and introducing means for introducing the artificial blood vessel inner 30 layer into the blood vessel.

The introducing means preferably comprise a catheter-like element 3 (see figures 1, 3-6) which is preferably operated from outside of the body (see figure 1).

The artificial blood vessel inner layer 2 (figures 35 2-7), which preferably takes the form of a blood vessel tunica-intima, comprises a tube-like section of synthetic material.

5

A protective cover is preferably associated with the assembly 1, this preferably taking the form of a removeable sheath 4 (figures 3, 4) which extends from the front of the assembly 1 to the catheter operator.

This protective sheath 4 ensures that minimal damage is incurred to the blood vessel wall during introduction of the assembly 1 and that the artificial tunica-intima 2 is substantially protected from any possible interferences which could hinder introduction.

Diameter arranging means are preferably associated with the tube-like section of synthetic material, said diameter arranging means preferably being a length of preprogrammed memory metal 5 (figures 2-7). These diameter arranging means are often referred to as a "stent".

The tube-like section of the artificial tunicaintima 2 is preferably folded over at its leading end (see figures 2-6), the resulting fold 6 of for example 2 cm preferably enclosing the length of memory metal 5 which preferably takes the form of a coil.

The artificial tunica-intima 2 is preferably made of a fluoro carbon polymer, by choice the polymer which goes under the name of teflon, a trademarked name, of Du Pont. Clinical tests have shown that teflon is efficient in ensuring a minimum restenosis of blood vessels.

25 The fact that the coil of memory metal 5 is enclosed as it were in the fold 6 of the artificial tunica-intima 2, means that the memory metal 5 does not come into direct contact with either the blood vessel or the blood stream, so that calcium or any other such blood vessel

30 blocking material is not given a 'foot-hold', on the memory metal, on which it could remain, a factor which further reduces restenosis and/or the rate at which restenosis occurs.

For example, the coil of memory metal can be 35 preprogrammed to increase from a diameter of about 2 mm at room temperature to a diameter of about 8 mm at a temperature of about 35°C in the blood vessel.

The fact that the length of memory metal is preferably in the form of a coil, ensures that a uniform expansion/contraction of the artificial tunica-intima occurs when the preprogrammed temperature of the memory metal is reached.

In use the assembly is inserted into the blood vessel via an incision already made (see figure 1). A guiding wire (not shown) can be introduced into the blood vessel, before introduction of the assembly 1, whereafter the assembly 1 can be pushed over this guiding wire and through the blood vessel.

Blood vessel widening means, for widening the blood vessel during introduction of the assembly, bunging means for blocking off the passage of blood into the assembly during introduction of the assembly into the blood vessel, which could cause introduction complications, and pressure exerting means for pushing the introduced artificial tunica-intima against the blood vessel walls when in position, are preferably associated with the assembly, and preferably take the form of a cone-like element 7 mounted on the front of the catheter-like element 3 (see figures 3-6).

The cone-shape of the cone-like element 7 enables the assembly 1 to easily follow the passage of the blood 25 vessel, pushing the blood vessel walls apart as it goes in order to facilitate introduction of the assembly 1.

During introduction of the assembly 1, the conelike element 7 is pushed to a point just past were the old tunica-intima was severed so that the fold 6 of the 30 artificial tunica-intima 2 is encircled by the loose hanging remaining piece of the original tunica-intima 8 (see figures 3-7). At this point forward movement of the assembly 1 is stopped.

The protective sheath 4 is then pulled back off 35 the assembly 1 whilst the assembly 1 itself is held in position (figure 4). The artificial tunica-intima 2, still in its small diameter state, at this point in time, is relatively tightly wrapped around the catheter-like element 3 (see figure 4).

During withdraw of the protective sheath 4, it was found during clinical tests that the artificial tunicaintima 2 sometimes had the inclination to be pulled back along the catheter-like element 3 together with the sheath 4. In order to prevent this, the catheter-like element 3 can be locally given a somewhat smaller diameter 9 at the position where the memory metal coil 5 is associated with the fold 6 (see figures 3-6), so that the fold 6 and coil of memory metal 5 remain secured in the desired position on withdrawal of the protective sheath 4.

A further feature of the protective sheath is that it aids in insulating the coil of memory metal from the 15 temperature in the blood vessel during introduction of the assembly, so that the coil does not assume its preprogrammed shape until reaching its activation temperature which occurs when the sheath is withdrawn. This prevents the coil from expanding at an undesired position within the 20 blood vessel.

A short period after withdrawal of the protective sheath the coil of memory metal 5 reaches its activation temperature, whereupon the coil of memory metal 5 increases in diameter and so doing pushes the artificial tunica-intima 25 2 against the walls of the blood vessel (see figure 5).

The artificial tunica-intima 2 pushes the loose hanging piece of remaining old tunica-intima 8 into the blood vessel wall so that this no longer flaps around in the blood stream (see figures 5-7).

The diameter of the artificial tunica-intima 2 is now large enough for the catheter-like element 3, plus the cone-like element 7 to be withdrawn out of the blood vessel, the cone-like element 7 further exerting a certain pressure on the artificial tunica-intima 2 during this withdrawal to further open out and push the latter somewhat into the blood vessel wall (see figure 6).

According to the present invention, it is not necessary to support the artificial tunica-intima over its

WO 96/10375

whole length, whereby unnecessary added pressure is exerted against the blood vessel wall. The artificial tunica-intima, once in place, is held in position by the blood pressure.

8

After removal of the sheath 4 and the catheter
5 like element 3, the artificial tunica-intima 2 can be joined
to the blood vessel wall near the incision, preferably by
means of stitches. However as shown in figure 7 another
possibility to secure the artificial tunica-intima in
position within the blood vessel is to equip the artificial
tunica-intima with a further coil of memory metal so that
the both ends of the artificial section of tunica-intima are
forced against blood vessel wall.

After a period of time the artificial tunicaintima grows onto the original blood vessel wall.

It will be obvious that during sterilisation, before introduction of the assembly, the memory metal coil should be temporarily held in its small diameter state, by means of for instance a collar, so that it does not assume its preprogrammed expanded form at this stage.

A further embodiment of the present invention is shown in figures 8 and 9.

In this embodiment 20, the length of preprogrammed memory metal, is replaced by a section of gauze-like material 21 (figures 8 and 9), enclosed within an end section 22 of the artificial tunica-intima.

The end section 22 and artificial intima-tunica are pushed over an expandible balloon 23 and a protective sheath, not shown, is brought thereover. Following introduction, the sheath is removed and the balloon 23 expanded to force the end section 22 against the wall of the blood vessel, whereby it is held in position by the stent 21, to affix with the blood vessel wall. Blood pressure forces the length of unsupported artificial intima-tunica to affix with the blood vessel wall as in the first embodiment.

35 Following positioning, the balloon 23 is removed.

This stent 21 is preferably made from stainless steel.

9

The artificial tunica-intima is required to be supple, and have elastic and anti-thrombogenic qualities and is preferably porous, in order to mimic the qualities of the tunica-intima. A suitable material herefor is

5 polytetrafluorethylene made by Dacron.

The material for the artificial tunica-intima can be supplied with endothelial cells in order to further enhance its working as a tunica-intima.

Although the present invention refers to the
10 introduction and placing of an artificial intima tunica,
intima tunicas from the patient self and from donors may be
introduced and arranged in position according to the present
invention.

The present invention thus yields a simple yet 15 efficient introduction of a new artificial inner blood vessel layer, which can be carried out in a short time and with a minimum of discomfort to the patient.

The present invention is not limited to the hereabove described and illustrated embodiments, rather 20 within the range of the following claims, a large number of modifications and variations are conceivable.

CLAIMS

- 1. A blood vessel treating assembly comprising:
- an artificial blood vessel inner layer such as an artificial tunica-intima or the like for replacing a section of blood vessel inner layer previously removed from 5 a blood vessel and/or for covering a predetermined length of damaged blood vessel inner layer, wherein said artificial blood vessel inner layer is associated with the existing blood vessel in such a way as to substantially stop any loose parts of the blood vessel from obstructing the stream
 of blood through said blood vessel, and
 - introducing means for introducing the artificial blood vessel inner layer into the blood vessel.
- A blood vessel treating assembly according to claim 1, further comprising at least one sheath-like
 protective cover.
- 3. An artificial blood vessel inner layer such as an artificial tunica-intima or the like, comprising at least one tube-like section of synthetic material, and diameter arranging means for increasing and/or decreasing the 20 diameter of the tube-like section.
- 4. An artificial blood vessel inner layer according to claim 3 wherein the diameter arranging means is at least one length of memory metal associated with the tubelike section, preprogrammed to expand and/or contract at 25 a determined temperature.
- 5. An artificial blood vessel inner layer according to claims 3 or 4 wherein the memory metal is associated with the artificial blood vessel inner layer in such a way that when said artificial blood vessel inner layer is in position within a blood vessel, said artificial blood vessel inner layer substantially stops blood flowing through the blood vessel from coming into contact with the memory metal.


11

- 6. Introducing means for introducing an artificial blood vessel inner layer, or the like, into a blood vessel, or the like, wherein the introducing means comprises at least one catheter-like element associated with the 5 artificial blood vessel inner layer.
 - 7. A blood vessel treating assembly according to claims 1 or 2, further comprising widening means for widening out of the blood vessel in order to facilitate introduction of the blood vessel treating assembly therein.
- 8. A blood vessel treating assembly according to claims 1, 2 or 7 further comprising bunging means for substantially blocking off the passage of blood into the assembly during introduction of the assembly into the blood vessel.
- 9. A blood vessel treating assembly according to claims 1, 2, 7 or 8 further comprising pressure exerting means for exerting pressure onto the artificial blood vessel inner layer, when the latter is in position within the blood vessel.
- 20 10. A blood vessel treating assembly according to claims 1, 2, 7, 8 or 9 wherein the blood vessel widening means, the bunging means and the pressure exerting means take the form of at least one cone-shaped elemente associated with the front of the introducing means.
- 25
 11. A blood vessel treating assembly according to the claims 1, 2, 7-10, provided with an artificial blood vessel inner layer according to claims 3 to 5 and introducing means according to claim 6.
- 12. A method of replacing a previously removed
 30 inner layer of a blood vessel and/or for covering a
 predetermined length of damaged blood vessel inner layer
 comprising the steps of inserting a blood vessel treating
 assembly according to claim 11, via an incision, upto a
 predetermined distance into a blood vessel, removing the
 35 protective sheath from around the assembly whereafter the
 memory metal expands on reaching its preprogrammed
 activation temperature to push the artificial blood vessel
 inner layer against the blood vessel walls, the catheter-

12

like element then being removed from the blood vessel, the conelike element further forcing the artificial blood vessel inner layer into position as it does so, and joining the end of the artificial blood vessel inner layer to the existing blood vessel near the incision.

- 13. A method of increasing and/or decreasing the diameter of a length of artificial blood vessel inner layer, according to claims 3 to 5, or the like, comprising bringing the memory metal associated with the artificial blood vessel inner layer to its preprogrammed activation temperature whereafter expansion/contraction of the memory metal effectively increases/decreases the diameter of the length of artificial blood vessel inner layer.
- 14. Assembly comprising a tube-like section with at least one length of memory metal associated therewith, pre-programmed to assume a desired form and/or expand and/or contract at a pre-determined activation temperature, and introducing means for introducing the tube-like section into a passage-like area.

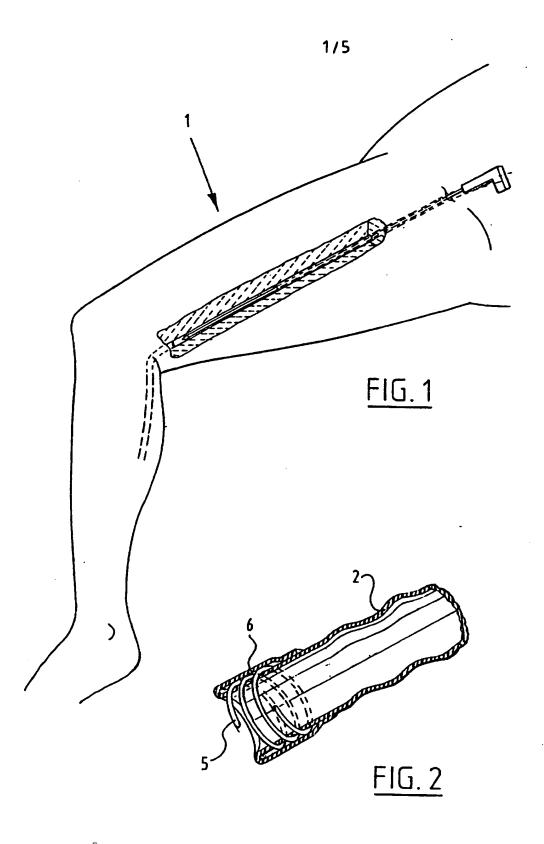

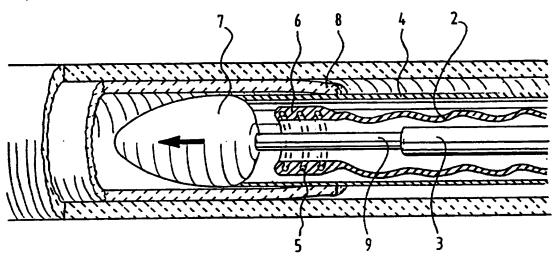


FIG. 3

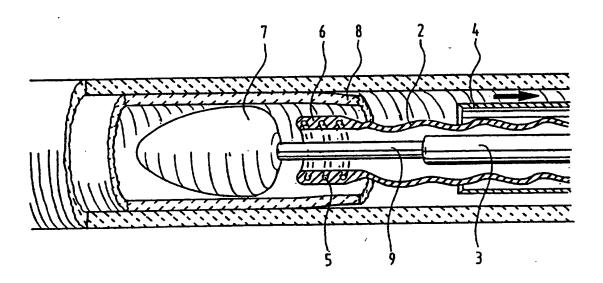


FIG. 4




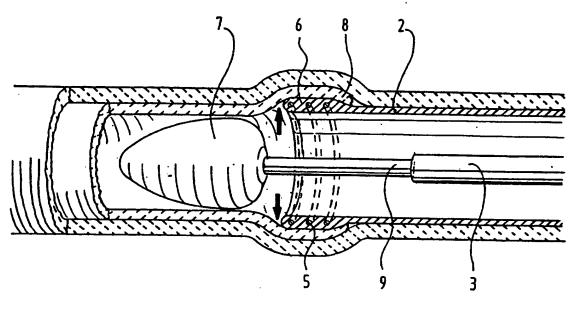


FIG. 5

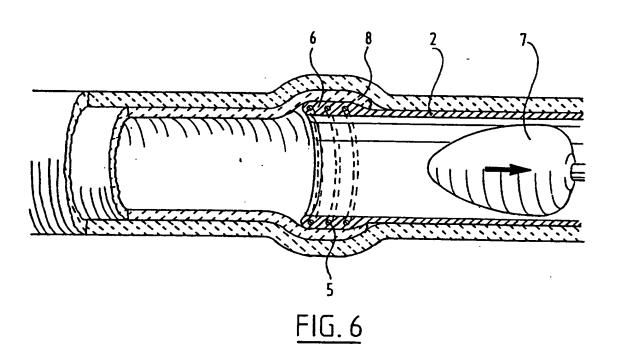

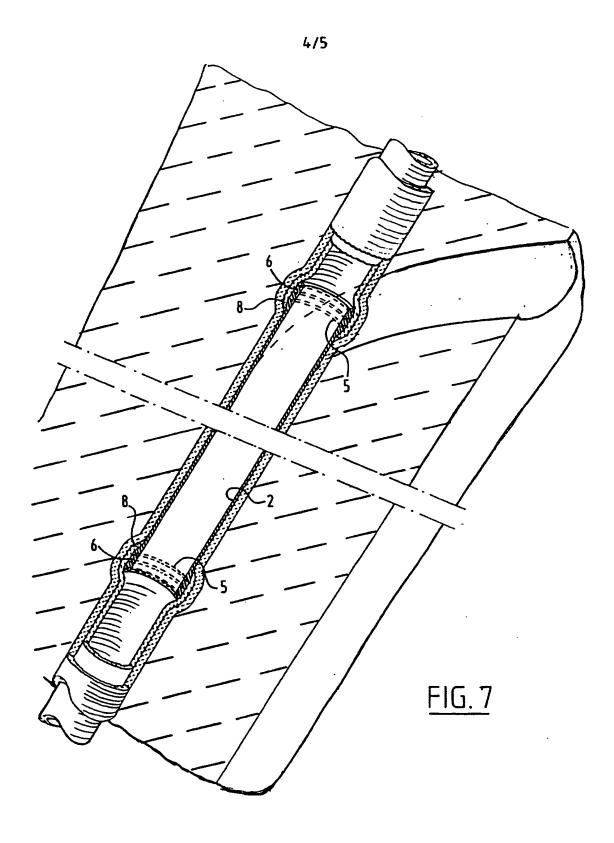

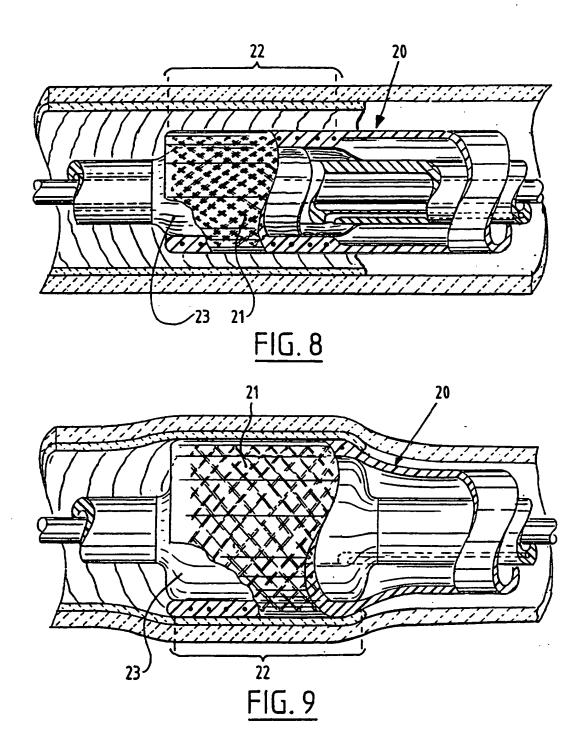

INTERNATIONAL SEARCH REPORT

Into 121 Application No PCT/NL 95/00336

A. CLASSI IPC 6	FICATION OF SUBJECT MATTER A61F2/06	-		
According to	International Patent Classification (IPC) or to both national classific	atron and IPC		
B. FIELDS	SEARCHED			
Minemum de IPC 6	ocumentation searched (classification system followed by classification $A61F$	a symbols)		
	on searched other than minimum documentation to the extent that su		erched	
Electronic d	ata base consulted during the international search (name of data base	and, where practical, search terms used)	-	
C. DOCUM	IENTS CONSIDERED TO BE RELEVANT			
Category *	Citation of document, with indication, where appropriate, of the rele	evant passages	Relevant to claim No.	
x	WO,A,94 04096 (NOVADIS) 3 March 19	994	1-6,9, 11,13,14	
Y	see abstract; figures see page 5, line 15-20			
X	EP,A,O 119 688 (BALKO) 26 September	1-6,9, 11,13,14		
	see the whole document			
Y	US,A,4 665 918 (BOSTON SCIENTIFIC 19 May 1987 see abstract; figures 9-13	7,10		
Y	WO,A,90 01969 (SLEPIAN) 8 March 1 see figures 13A-D	8		
٨	EP,A,O 274 846 (ADVANGED SURGICAL INTERVENTION INC.) 20 July 1988			
Fur	ther documents are listed in the continuation of box C.	X Patent family members are listed	in spinet.	
1 .		T later document published after the int or priority date and not in conflict we great to independ the armounts or the	AN COS EDIDITICADAM ANY	
A document defining the general state of the art which is not considered to be of particular relevance invention *E* earlier document but published on or after the international filing date *C** **E** **C** **C**				
"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is considered to involve an inventive step when the				
'P' docur	means ment published prior to the international filing date but	ments, such combination being obvious the art. '&' document member of the same paten	ons to a beason senter	
later	than the priority date claimed e actual completion of the international search	Date of mailing of the international s		
1	9 January 1996	1 8. DL 96		
Name and	I mailing address of the ISA	Authorized officer		
	European Patent Office, P.B. 5818 Patentiaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040, Tx. 31 651 epo ni, Fax (+31-70) 340-3016 Steenbakker, J			

1

INTERNATIONAL SEARCH REPORT

national application No.

PCT/NL95/00336

Box I	Observations where certain claims were found unsearchable (Continuation of item 1 of first sheet)
This int	ernational search report has not been established in respect of certain claims under Article 17(2)(a) for the following reasons:
1. X	Claims Nos.: 12 because they relate to subject matter not required to be searched by this Authority, namely: PCT Rule 39.1 (iv)
2.	Claims Nos.: because they relate to parts of the international application that do not comply with the prescribed requirements to such an extent that no meaningful international search can be carried out, specifically:
3.	Claims Nos.: because they are dependent claims and are not drafted in accordance with the second and third sentences of Rule 6.4(a).
Box II	Observations where unity of invention is lacking (Continuation of item 2 of first sheet)
This Inte	ernational Searching Authority found multiple inventions in this international application, as follows:
ւ 🔲	As all required additional search fees were timely paid by the applicant, this international search report covers all searchable claims.
2.	As all searchable claims could be searches without effort justifying an additional fee, this Authority did not invite payment of any additional fee.
3.	As only some of the required additional search fees were timely paid by the applicant, this international search report covers only those claims for which fees were paid, specifically claims Nos.:
4.	No required additional search fees were timely paid by the applicant. Consequently, this international search report is restricted to the invention first mentioned in the claims; it is covered by claims Nos.:
Remark (The additional search fees were accompanied by the applicant's protest. No protest accompanied the payment of additional search fees.

INTERNATIONAL SEARCH REPORT

information on patent family members

Intera sal Application No PCT/NL 95/00336

Patent document sited in search report	Publication date	Patent memb		Publication date
WO-A-9404096	03-03-94	FR-A-	2694688	18-02-94
EP-A-0119688	26-09-84	US-A-	4512338	23-04-85
US-A-4665918	19-05-87	NONE		
	08-03-90	AT-T-	121954	15-05-95
10 V 2001303	00 00 20	AU-B-	4191989	23-03-90
		CA-A-	1336755	22-08-95
		DE-D-	68922497	08-06-95
		DE-T-	68922497	14-09-95
		EP-A-	0431046	12-06-91
		EP-A-	0649637	26-04-95
		JP-T-	4501670	26-03-92
		US-A-	5213580	25-05-93
EP-A-0274846	20-07-88	US-A-	4893623	16-01-90
EF-X-02/4040	20 0. 00	US-A-	4762128	09-08-88
		AU-B-	649650	02-06-94
		AU-B-	7120091	02-05-91
		AU-B-	7120191	02-05-91
		AU-B-	609431	02-05-91
		AU-B-	8210087	09-06-88
		DE-D-	3789053	24-03-94
		DE-T-	3789053	11-08-94
		ES-T-	2049219	16-04-94
		JP-A-	63214264	06-09-88
		US-A-	5312430	17-05-94
	ZA-A-	8709207	06-06-88	

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:
☐ BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
FADED TEXT OR DRAWING
BLURRED OR ILLEGIBLE TEXT OR DRAWING
☐ SKEWED/SLANTED IMAGES
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
☐ GRAY SCALE DOCUMENTS
☐ LINES OR MARKS ON ORIGINAL DOCUMENT
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
OTHER:

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.

THIS PAGE BLANK (USPTO)